



Yuasa Scheda Tecnica

Yuasa YBX3012 - Batterie YBX3000 SMF

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Prestazione

| | |
|----------------------------|------|
| Tensione | 12V |
| Capacità (20 ore) | 52Ah |
| Corrente di spunto A (EN1) | 450A |

Dimensioni

| | |
|------------|-------|
| Lunghezza | 207mm |
| Profondità | 175mm |
| Altezza | 190mm |

Pesi e Misure

| | |
|----------------------|--------|
| Peso medio con acido | 13.3kg |
|----------------------|--------|



Caratteristiche del Monoblocco

| | |
|----------------------------------|----------------------|
| Tipo di monoblocco | L1 DIN |
| Fissaggi alla base | B3 |
| Indicatore dello stato di carica | ✓ |
| Maniglie | ✓ |
| Circuito di sfiato | ✓ |
| Tipo di coperchio | Doppio Coperchio SMF |

Tecnologia

| | |
|---------------------------------|-------------|
| Pastiglia antideflagrante | ✓ |
| Tecnologia | Ca/Ca |
| Separatore | PE |
| Test antiribaltamento VDA | ✓ |
| Corrente di carica raccomandata | 3A |
| Performance Marking | W3-C2-V2-E1 |


Tipologia dei terminali

Schema di Collegamento

Fissaggio batteria


T1

Standard DIN Post

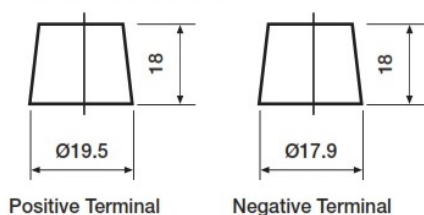

Positive Terminal

Negative Terminal

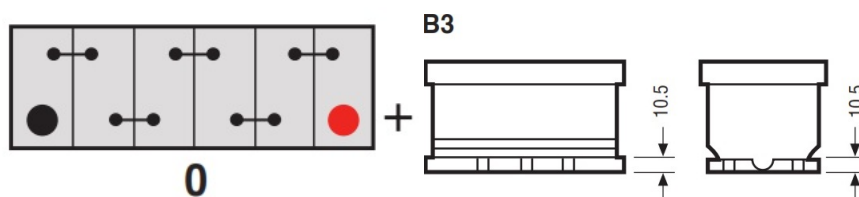

Scheda tecnica prodotta su E&OE



Yuasa Technical Data Sheet

Yuasa YBX3012 - YBX3000 SMF Batteries

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

| | |
|--------------------------|------|
| Voltage | 12V |
| Capacity (20-hour) | 52Ah |
| Cold Cranking Amps (EN1) | 450A |

Dimensions

| | |
|--------|-------|
| Length | 207mm |
| Width | 175mm |
| Height | 190mm |

Weights & Measures

| | |
|-----------------------|--------|
| Mean Weight with Acid | 13.3kg |
|-----------------------|--------|



Container Features

| | |
|---------------------------|----------------|
| Case Type | L1 DIN |
| Hold Down | B3 |
| State of Charge Indicator | ✓ |
| Handles | ✓ |
| End Venting | ✓ |
| Lid Type | SMF Double Lid |


Technology

| | |
|---------------------------|-------------|
| Flame Arrestor Technology | ✓ |
| Separator | Ca/Ca |
| VDA Roll Over Test | PE |
| Recommended Charge Rate | ✓ |
| Performance Marking | 3A |
| | W3-C2-V2-E1 |

Terminal Type

T1


Standard DIN Post

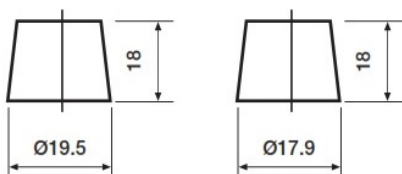

Positive Terminal


Negative Terminal

Cell Assembly Layout

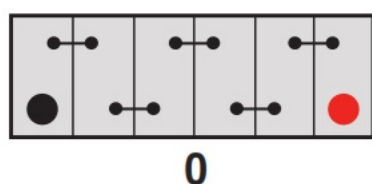

Battery Hold-down

B3

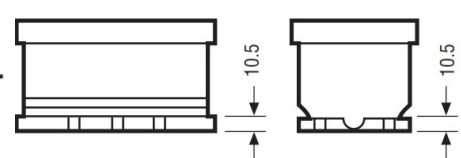

Data Sheet generated on 26/03/2021 - E&OE