



Yuasa Scheda Tecnica

Yuasa YBX3053 - Batterie YBX3000 SMF

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Prestazione

Tensione	12V
Capacità (20 ore)	45Ah
Corrente di spunto A (EN1)	400A

Dimensioni

Lunghezza	238mm
Profondità	129mm
Altezza	225mm

Pesi e Misure

Peso medio con acido	12.4kg
----------------------	--------



Caratteristiche del Monoblocco

Tipo di monoblocco	JIS B24
Fissaggi alla base	N
Indicatore dello stato di carica	✓
Maniglie	✓
Circuito di sfiato	✓
Tipo di coperchio	Doppio Coperchio SMF


Tecnologia

Pastiglia antideflagrante	✓
Tecnologia	Ca/Ca
Separatore	PE
Test antiribaltamento VDA	✓
Corrente di carica raccomandata	3A
Performance Marking	W3-C2-V2-E1


Tipologia dei terminali

T1/T3


Standard DIN Post



Remove T1 adapter for T3



Schema di Collegamento

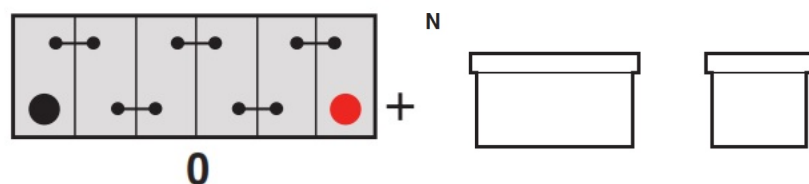

Fissaggio batteria

Scheda tecnica prodotta su E&OE



Yuasa Technical Data Sheet

Yuasa YBX3053 - YBX3000 SMF Batteries

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

Voltage	12V
Capacity (20-hour)	45Ah
Cold Cranking Amps (EN1)	400A

Dimensions

Length	238mm
Width	129mm
Height	225mm

Weights & Measures

Mean Weight with Acid	12.4kg
-----------------------	--------



Container Features

Case Type	JIS B24
Hold Down	N
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca
VDA Roll Over Test	PE
Recommended Charge Rate	✓
Performance Marking	3A
	W3-C2-V2-E1


Terminal Type

T1/T3


Standard DIN Post



Remove T1 adapter for T3



Cell Assembly Layout

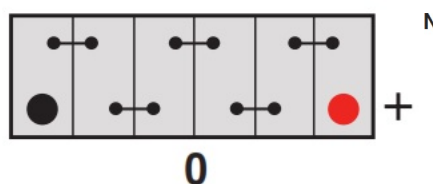

Battery Hold-down



Data Sheet generated on 26/03/2021 – E&OE