



## Yuasa Scheda Tecnica

### Yuasa YBX3057 - Batterie YBX3000 SMF

#### Prestazione

Tensione	12V
Capacità (20 ore)	45Ah
Corrente di spunto A (EN1)	400A

#### Dimensioni

Lunghezza	238mm
Profondità	129mm
Altezza	225mm

#### Pesi e Misure

Peso medio con acido	12.4kg
----------------------	--------



#### Caratteristiche del Monoblocco

Tipo di monoblocco	JIS B24
Schema polarità	1
Fissaggi alla base	N
Indicatore dello stato di carica	✓
Maniglie	✓
Circuito di sfiato	✓
Tipo di coperchio	Doppio Coperchio SMF


#### Tecnologia

Pastiglia antideflagrante	✓
Tecnologia	Ca/Ca
Separatore	PE
Test antiribaltamento VDA	✓
Corrente di carica raccomandata	3A
Performance Marking	W3-C2-V2-E1


#### Tipologia dei terminali

##### T1/T3


Standard DIN Post



Remove T1 adapter for T3



#### Schema di Collegamento

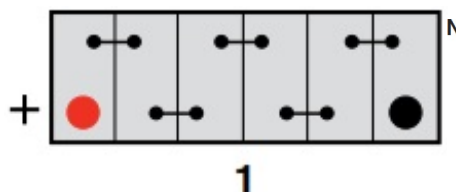

#### Fissaggio batteria



Scheda tecnica prodotta su E&OE



## Yuasa Technical Data Sheet

### Yuasa YBX3057 - YBX3000 SMF Batteries

#### Performance

Voltage	12V
Capacity (20-hour)	45Ah
Cold Cranking Amps (EN1)	400A

#### Dimensions

Length	238mm
Width	129mm
Height	225mm

#### Weights & Measures

Mean Weight with Acid	12.4kg
-----------------------	--------



#### Container Features

Case Type	JIS B24
Cell Layout	1
Hold Down	N
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


#### Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	3A
Performance Marking	W3-C2-V2-E1


#### Terminal Type

##### T1/T3


Standard DIN Post



Remove T1 adapter for T3



#### Cell Assembly Layout

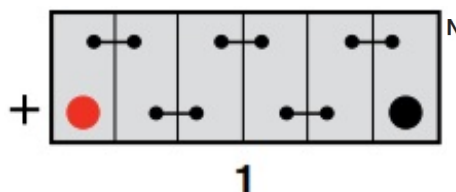

#### Battery Hold-down



Data Sheet generated on 26/03/2021 - E&OE