



Yuasa Scheda Tecnica

Yuasa YBX3069 - Batterie YBX3000 SMF

Prestazione

Tensione	12V
Capacità (20 ore)	72Ah
Corrente di spunto A (EN1)	630A

Dimensioni

Lunghezza	269mm
Profondità	174mm
Altezza	225mm

Pesi e Misure

Peso medio con acido	17.5kg
----------------------	--------



Caratteristiche del Monoblocco

Tipo di monoblocco	JIS D26 + B9
Schema polarità	1
Fissaggi alla base	B5
Indicatore dello stato di carica	✓
Maniglie	✓
Circuito di sfiato	✓
Tipo di coperchio	Doppio Coperchio SMF

Tecnologia

Pastiglia antideflagrante	✓
Tecnologia	Ca/Ca
Separatore	PE
Test antiribaltamento VDA	✓
Corrente di carica raccomandata	4A
Performance Marking	W4-C2-V3-E1

Tipologia dei terminali

Schema di Collegamento

Fissaggio batteria

T1

Standard DIN Post



Scheda tecnica prodotta su E&OE



Yuasa Technical Data Sheet

Yuasa YBX3069 - YBX3000 SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	72Ah
Cold Cranking Amps (EN1)	630A

Dimensions

Length	269mm
Width	174mm
Height	225mm

Weights & Measures

Mean Weight with Acid	17.5kg
-----------------------	--------



Container Features

Case Type	JIS D26 + B9
Cell Layout	1
Hold Down	B5
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca
VDA Roll Over Test	PE
Recommended Charge Rate	✓
Performance Marking	4A
	W4-C2-V3-E1

Terminal Type

T1


Standard DIN Post

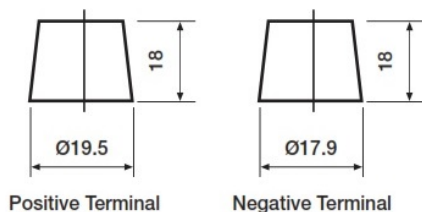


Positive Terminal

Negative Terminal

Cell Assembly Layout

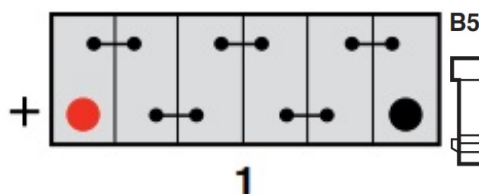

Battery Hold-down

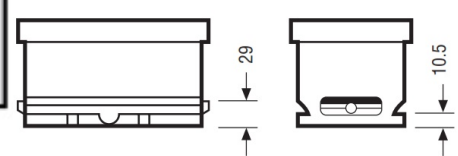

Data Sheet generated on 26/03/2021 - E&OE