



Yuasa Scheda Tecnica

Yuasa YBX3113 - Batterie YBX3000 SMF

Prestazione

Tensione	12V
Capacità (20 ore)	50Ah
Corrente di spunto A (EN1)	530A

Dimensioni

Lunghezza	236mm
Profondità	182mm
Altezza	178mm

Pesi e Misure

Peso medio con acido	12.9kg
----------------------	--------



Caratteristiche del Monoblocco

Tipo di monoblocco	US Gp 58
Schema polarità	1
Fissaggi alla base	B1
Indicatore dello stato di carica	✓
Maniglie	✓
Circuito di sfiato	✓
Tipo di coperchio	Doppio Coperchio SMF

Tecnologia

Pastiglia antideflagrante	✓
Tecnologia	Ca/Ca
Separatore	PE
Test antiribaltamento VDA	✓
Corrente di carica raccomandata	4A
Performance Marking	W4-C2-V3-E1

Tipologia dei terminali

Schema di Collegamento

Fissaggio batteria

T1

Standard DIN Post



Scheda tecnica prodotta su E&OE



Yuasa Technical Data Sheet

Yuasa YBX3113 - YBX3000 SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	50Ah
Cold Cranking Amps (EN1)	530A

Dimensions

Length	236mm
Width	182mm
Height	178mm

Weights & Measures

Mean Weight with Acid	12.9kg
-----------------------	--------



Container Features

Case Type	US Gp 58
Cell Layout	1
Hold Down	B1
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	4A
Performance Marking	W4-C2-V3-E1

Terminal Type

T1


Standard DIN Post

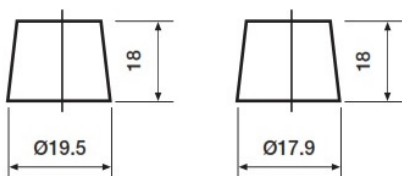


Positive Terminal

Negative Terminal

Cell Assembly Layout

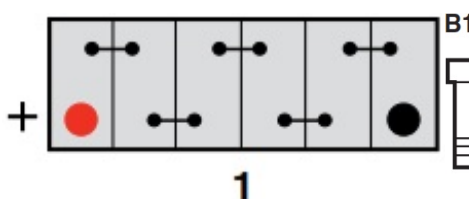

Battery Hold-down

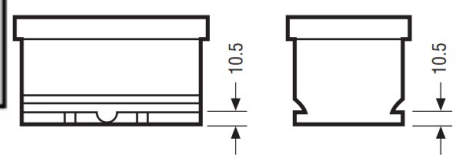

Data Sheet generated on 26/03/2021 - E&OE