



## Yuasa Scheda Tecnica

### Yuasa YBX5012 - Batterie YBX5000 Silver High Performance SMF

#### Prestazione

Tensione	12V
Capacità (20 ore)	54Ah
Corrente di spunto A (EN1)	500A

#### Dimensioni

Lunghezza	207mm
Profondità	175mm
Altezza	190mm

#### Pesi e Misure

Peso medio con acido	13.4kg
----------------------	--------



#### Caratteristiche del Monoblocco

Tipo di monoblocco	L1 DIN
Fissaggi alla base	B3
Indicatore dello stato di carica	✓
Maniglie	✓
Circuito di sfiato	✓
Tipo di coperchio	Doppio Coperchio SMF

#### Tecnologia

Pastiglia antideflagrante	✓
Tecnologia	Ca/Ca
Separatore	PE
Test antiribaltamento VDA	✓
Corrente di carica raccomandata	4A
Performance Marking	W4-C2-V3-E1


#### Tipologia dei terminali

#### Schema di Collegamento

#### Fissaggio batteria


#### T1

Standard DIN Post

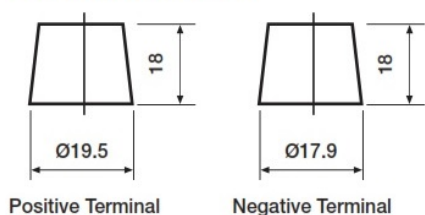

Positive Terminal

Negative Terminal

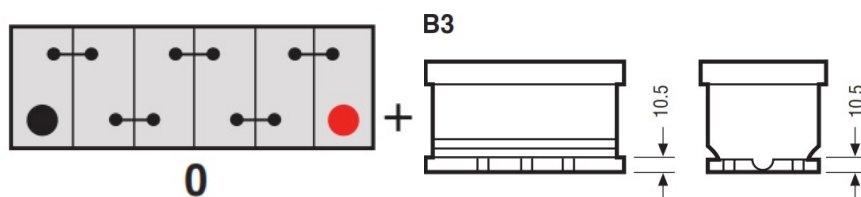

Scheda tecnica prodotta su E&OE



## Yuasa Technical Data Sheet

### Yuasa YBX5012 - YBX5000 Silver High Performance SMF Batteries

#### Performance

Voltage	12V
Capacity (20-hour)	54Ah
Cold Cranking Amps (EN1)	500A

#### Dimensions

Length	207mm
Width	175mm
Height	190mm

#### Weights & Measures

Mean Weight with Acid	13.4kg
-----------------------	--------



#### Container Features

Case Type	L1 DIN
Hold Down	B3
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid

#### Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca
VDA Roll Over Test	PE
Recommended Charge Rate	✓
Performance Marking	4A
	W4-C2-V3-E1

#### Terminal Type

##### T1


Standard DIN Post



Positive Terminal


Negative Terminal

#### Cell Assembly Layout

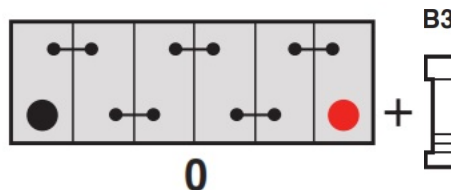

0

#### Battery Hold-down

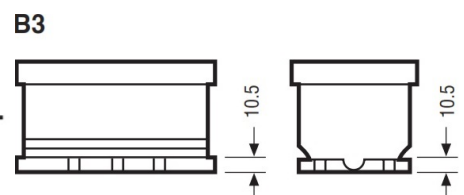

Data Sheet generated on 26/03/2021 - E&OE