



Yuasa Scheda Tecnica

Yuasa YBX5019 - Batterie YBX5000 Silver High Performance SMF

Prestazione

Tensione	12V
Capacità (20 ore)	100Ah
Corrente di spunto A (EN1)	900A

Dimensioni

Lunghezza	353mm
Profondità	175mm
Altezza	190mm

Pesi e Misure

Peso medio con acido	23.3kg
----------------------	--------



Caratteristiche del Monoblocco

Tipo di monoblocco	L5 DIN
Tipologia dei terminali	T1
Fissaggi alla base	B3
Indicatore dello stato di carica	✓
Maniglie	✓
Circuito di sfiato	✓
Tipo di coperchio	Doppio Coperchio SMF

Tecnologia

Pastiglia antideflagrante	✓
Tecnologia	Ca/Ca
Separatore	PE
Test antiribaltamento VDA	✓
Corrente di carica raccomandata	6A
Performance Marking	W4-C2-V3-E1


Tipologia dei terminali

Schema di Collegamento

Fissaggio batteria


T1

Standard DIN Post

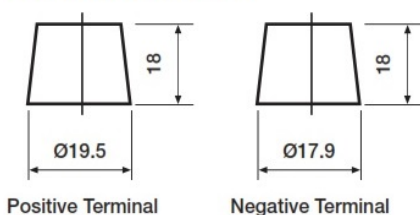

Positive Terminal

Negative Terminal

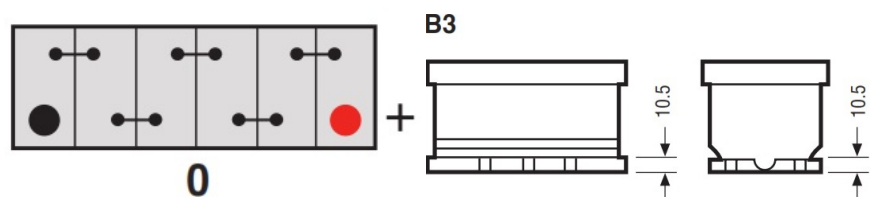

Scheda tecnica prodotta su E&OE



Yuasa Technical Data Sheet

Yuasa YBX5019 - YBX5000 Silver High Performance SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	100Ah
Cold Cranking Amps (EN1)	900A

Dimensions

Length	353mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	23.3kg
-----------------------	--------



Container Features

Case Type	L5 DIN
Terminal Type	T1
Hold Down	B3
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid

Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca
VDA Roll Over Test	PE
Recommended Charge Rate	✓
Performance Marking	6A
	W4-C2-V3-E1

Terminal Type

T1


Standard DIN Post



Positive Terminal


Negative Terminal

Cell Assembly Layout

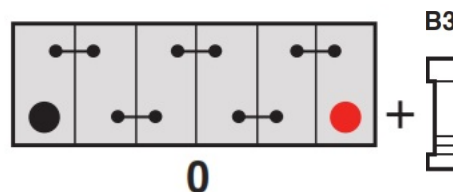

0

Battery Hold-down

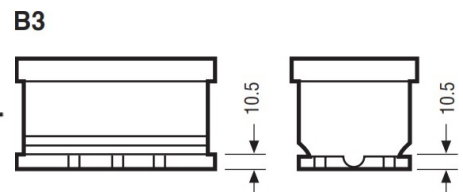

Data Sheet generated on 26/03/2021 - E&OE