



Yuasa Scheda Tecnica

Yuasa YBX5020 - Batterie YBX5000 Silver High Performance SMF

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Prestazione

Tensione	12V
Capacità (20 ore)	110Ah
Corrente di spunto A (EN1)	950A

Dimensioni

Lunghezza	393mm
Profondità	175mm
Altezza	190mm

Pesi e Misure

Peso medio con acido	26.3kg
----------------------	--------



Caratteristiche del Monoblocco

Tipo di monoblocco	L6 DIN
Fissaggi alla base	B3
Indicatore dello stato di carica	✓
Maniglie	✓
Circuito di sfiato	✓
Tipo di coperchio	Doppio Coperchio SMF

Tecnologia

Pastiglia antideflagrante	✓
Tecnologia	Ca/Ca
Separatore	PE
Test antiribaltamento VDA	✓
Corrente di carica raccomandata	6A
Performance Marking	W4-C2-V3-E1



Tipologia dei terminali

Schema di Collegamento

Fissaggio batteria

T1

Standard DIN Post

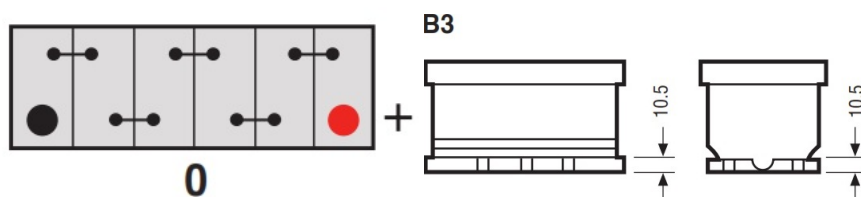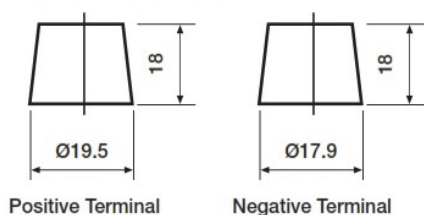

Scheda tecnica prodotta su E&OE



Yuasa Technical Data Sheet

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Yuasa YBX5020 - YBX5000 Silver High Performance SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	110Ah
Cold Cranking Amps (EN1)	950A

Dimensions

Length	393mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	26.3kg
-----------------------	--------



Container Features

Case Type	L6 DIN
Hold Down	B3
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	6A
Performance Marking	W4-C2-V3-E1

Terminal Type

T1


Standard DIN Post

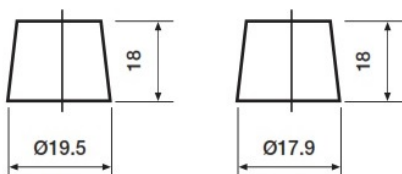

Positive Terminal

Negative Terminal

Cell Assembly Layout

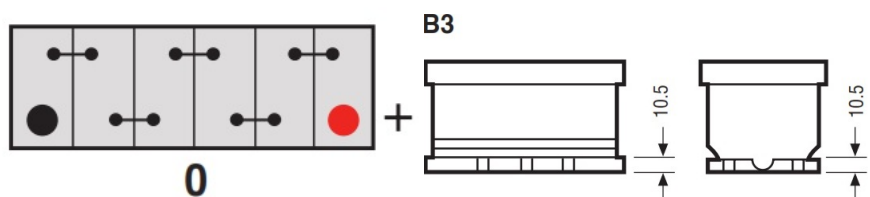

Battery Hold-down

Data Sheet generated on 26/03/2021 - E&OE