



Yuasa Scheda Tecnica

Yuasa YBX5027 - Batterie YBX5000 Silver High Performance SMF

Prestazione

Tensione	12V
Capacità (20 ore)	65Ah
Corrente di spunto A (EN1)	640A

Dimensioni

Lunghezza	243mm
Profondità	175mm
Altezza	190mm

Pesi e Misure

Peso medio con acido	15.6kg
----------------------	--------



Caratteristiche del Monoblocco

Tipo di monoblocco	L2 DIN
Fissaggi alla base	B13B14
Indicatore dello stato di carica	✓
Maniglie	✓
Circuito di sfiato	✓
Tipo di coperchio	Doppio Coperchio SMF

Tecnologia

Pastiglia antideflagrante	✓
Tecnologia	Ca/Ca
Separatore	PE
Test antiribaltamento VDA	✓
Corrente di carica raccomandata	4A
Performance Marking	W4-C2-V3-E1


Tipologia dei terminali

Schema di Collegamento

Fissaggio batteria


T1

Standard DIN Post

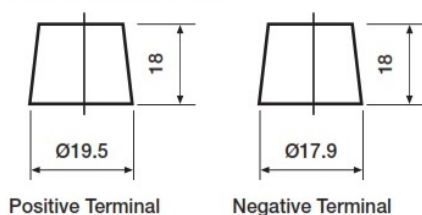


Positive Terminal

Negative Terminal

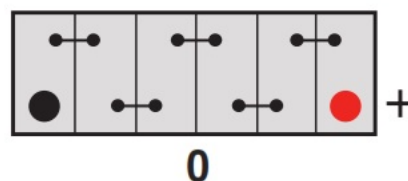

B3/B4 (B3 with Hold-Down adaptor)

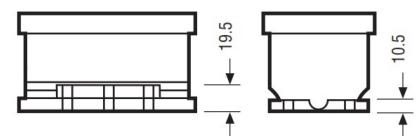

Scheda tecnica prodotta su E&OE



Yuasa Technical Data Sheet

Yuasa YBX5027 - YBX5000 Silver High Performance SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	65Ah
Cold Cranking Amps (EN1)	640A

Dimensions

Length	243mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	15.6kg
-----------------------	--------



Container Features

Case Type	L2 DIN
Hold Down	B13B14
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid

Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca
VDA Roll Over Test	PE
Recommended Charge Rate	✓
Performance Marking	4A
	W4-C2-V3-E1

Terminal Type

T1


Standard DIN Post



Positive Terminal


Negative Terminal

Cell Assembly Layout

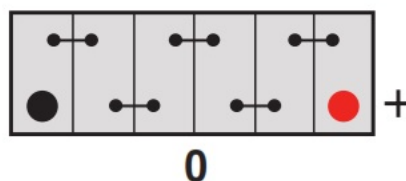

Battery Hold-down

B3/B4 (B3 with Hold-Down adaptor)

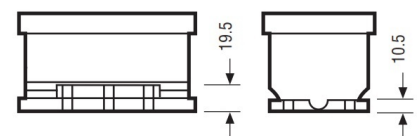

Data Sheet generated on 26/03/2021 - E&OE