



Yuasa Scheda Tecnica

Yuasa YBX5075 - Batterie YBX5000 Silver High Performance SMF

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Prestazione

Tensione	12V
Capacità (20 ore)	60Ah
Corrente di spunto A (EN1)	640A

Dimensioni

Lunghezza	243mm
Profondità	175mm
Altezza	175mm

Pesi e Misure

Peso medio con acido	14.7kg
----------------------	--------



Caratteristiche del Monoblocco

Tipo di monoblocco	LB2 DIN
Fissaggi alla base	B13B14
Indicatore dello stato di carica	✓
Maniglie	✓
Circuito di sfiato	✓
Tipo di coperchio	Doppio Coperchio SMF

Tecnologia

Pastiglia antideflagrante	✓
Tecnologia	Ca/Ca
Separatore	PE
Test antiribaltamento VDA	✓
Corrente di carica raccomandata	4A
Performance Marking	W4-C2-V3-E1


Tipologia dei terminali

Schema di Collegamento

Fissaggio batteria


T1

Standard DIN Post

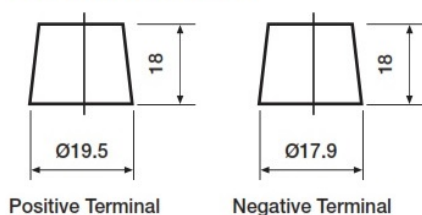


Positive Terminal

Negative Terminal

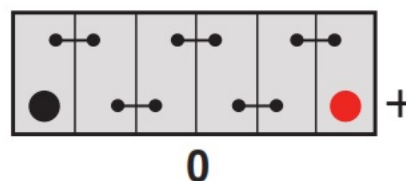

B3/B4 (B3 with Hold-Down adaptor)

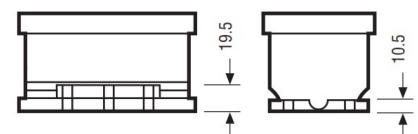

Scheda tecnica prodotta su E&OE



Yuasa Technical Data Sheet

Yuasa YBX5075 - YBX5000 Silver High Performance SMF Batteries

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

Voltage	12V
Capacity (20-hour)	60Ah
Cold Cranking Amps (EN1)	640A

Dimensions

Length	243mm
Width	175mm
Height	175mm

Weights & Measures

Mean Weight with Acid	14.7kg
-----------------------	--------



Container Features

Case Type	LB2 DIN
Hold Down	B13B14
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca
VDA Roll Over Test	PE
Recommended Charge Rate	✓
Performance Marking	4A
	W4-C2-V3-E1


Terminal Type

T1

Standard DIN Post

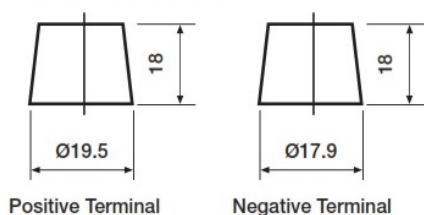


Cell Assembly Layout

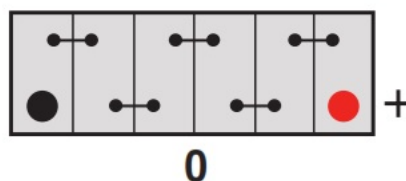

Battery Hold-down

B3/B4 (B3 with Hold-Down adaptor)

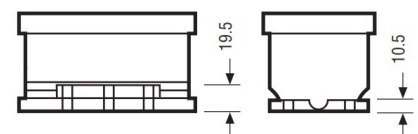

Data Sheet generated on 26/03/2021 - E&OE