



Yuasa Scheda Tecnica

Yuasa YBX5335 - Batterie YBX5000 Silver High Performance SMF

Prestazione


Tensione	12V
Capacità (20 ore)	100Ah
Corrente di spunto A (EN1)	830A

Dimensioni

Lunghezza	303mm
Profondità	174mm
Altezza	222mm

Pesi e Misure

Peso medio con acido	21.6kg
----------------------	--------

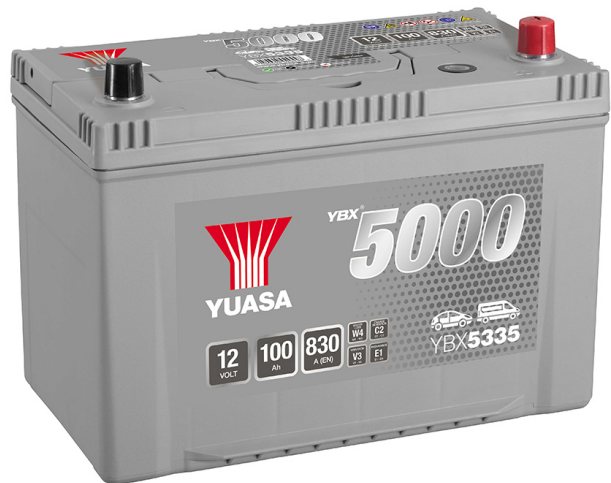

Caratteristiche del Monoblocco

Tipo di monoblocco	D31 JIS
Fissaggi alla base	B1
Indicatore dello stato di carica	✓
Maniglie	✓
Circuito di sfiato	✓
Tipo di coperchio	Doppio Coperchio SMF

Tecnologia

Pastiglia antideflagrante	✓
Tecnologia	Ca/Ca
Separatore	PE
Test antiribaltamento VDA	✓
Corrente di carica raccomandata	5A
Performance Marking	W4-C2-V3-E1



Tipologia dei terminali

Schema di Collegamento

Fissaggio batteria

T1

Standard DIN Post

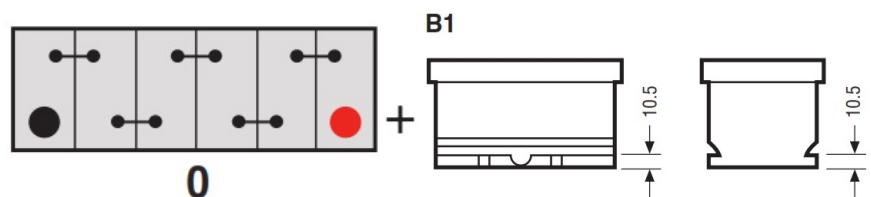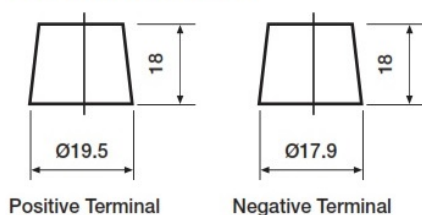

Scheda tecnica prodotta su E&OE



Yuasa Technical Data Sheet

Yuasa YBX5335 - YBX5000 Silver High Performance SMF Batteries

Performance


Voltage	12V
Capacity (20-hour)	100Ah
Cold Cranking Amps (EN1)	830A

Dimensions

Length	303mm
Width	174mm
Height	222mm

Weights & Measures

Mean Weight with Acid	21.6kg
-----------------------	--------

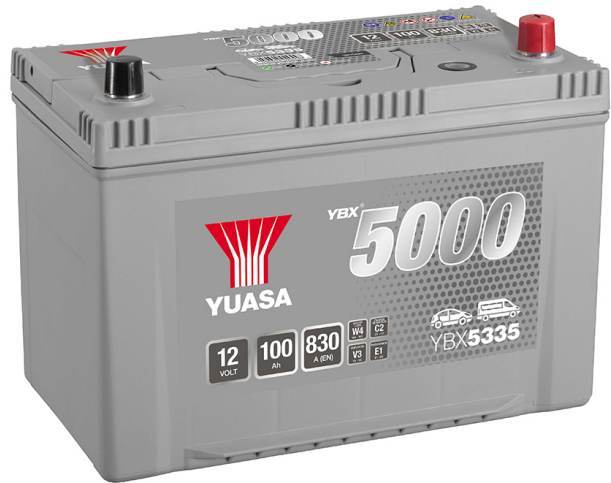

Container Features

Case Type	D31 JIS
Hold Down	B1
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca
VDA Roll Over Test	PE
Recommended Charge Rate	✓
Performance Marking	5A
	W4-C2-V3-E1

Terminal Type

T1


Standard DIN Post

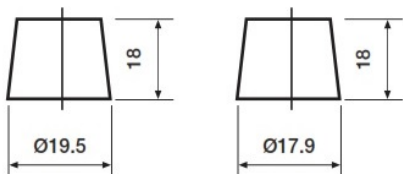

Positive Terminal


Negative Terminal

Cell Assembly Layout

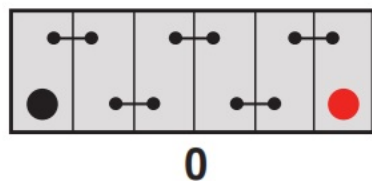

Battery Hold-down

B1

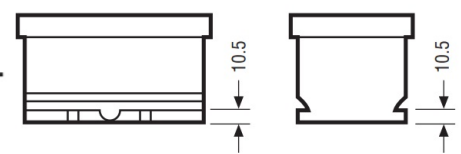

Data Sheet generated on 26/03/2021 - E&OE

