



## Yuasa Scheda Tecnica

### Yuasa YBX9027 - Batterie YBX9000 AGM Start Stop Plus

#### Prestazione

Tensione	12V
Capacità (20 ore)	60Ah
Corrente di spunto A (EN1)	640A

#### Dimensioni

Lunghezza	242mm
Profondità	175mm
Altezza	190mm

#### Pesi e Misure

Peso medio con acido	17.7kg
----------------------	--------



#### Caratteristiche del Monoblocco

Tipo di monoblocco	L2 DIN AGM
Fissaggi alla base	B3
Maniglie	✓
Circuito di sfiato	✓
Applicazioni da semi trazione	✓
Tipo di coperchio	VRLA

#### Tecnologia

Pastiglia antideflagrante	✓
Tecnologia	Ca/Ca VRLA
Separatore	AGM
Test antiribaltamento VDA	✓
Corrente di carica raccomandata	4A
Performance Marking	W5-C2-V3-M3


#### Tipologia dei terminali

#### Schema di Collegamento

#### Fissaggio batteria


#### T1

Standard DIN Post

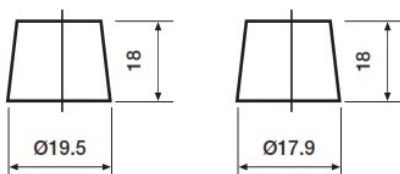

Positive Terminal

Negative Terminal

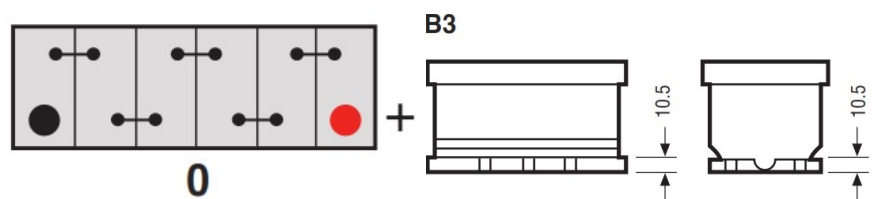

Scheda tecnica prodotta su E&OE



## Yuasa Technical Data Sheet

### Yuasa YBX9027 - YBX9000 AGM Start Stop Plus Batteries

#### Performance

Voltage	12V
Capacity (20-hour)	60Ah
Cold Cranking Amps (EN1)	640A

#### Dimensions

Length	242mm
Width	175mm
Height	190mm

#### Weights & Measures

Mean Weight with Acid	17.7kg
-----------------------	--------



#### Container Features

Case Type	L2 DIN AGM
Hold Down	B3
Handles	✓
End Venting	✓
Semi-Traction Features	✓
Lid Type	VRLA


#### Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca VRLA
VDA Roll Over Test	AGM
Recommended Charge Rate	✓
Performance Marking	4A
	W5-C2-V3-M3

#### Terminal Type

##### T1


Standard DIN Post

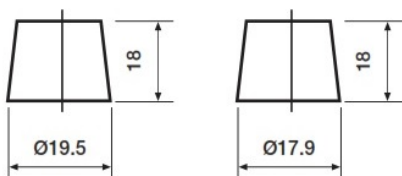


Positive Terminal

Negative Terminal

#### Cell Assembly Layout

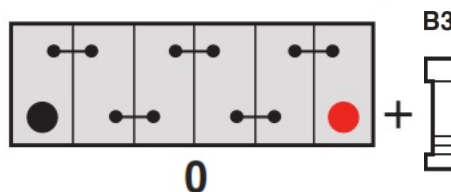

#### Battery Hold-down

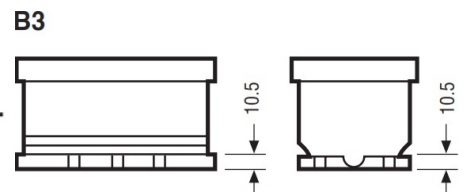

Data Sheet generated on 26/03/2021 - E&OE