



Yuasa Scheda Tecnica

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Yuasa YBX9115 - Batterie YBX9000 AGM Start Stop Plus

Prestazione

Tensione	12V
Capacità (20 ore)	80Ah
Corrente di spunto A (EN1)	800A

Dimensioni

Lunghezza	317mm
Profondità	175mm
Altezza	190mm

Pesi e Misure

Peso medio con acido	23.2kg
----------------------	--------



Caratteristiche del Monoblocco

Tipo di monoblocco	L4 DIN AGM
Fissaggi alla base	B3
Maniglie	✓
Circuito di sfiato	✓
Applicazioni da semi trazione	✓
Tipo di coperchio	VRLA

Tecnologia

Pastiglia antideflagrante	✓
Tecnologia	Ca/Ca VRLA
Separatore	AGM
Test antiribaltamento VDA	✓
Corrente di carica raccomandata	5A
Performance Marking	W5-C2-V3-M3


Tipologia dei terminali

Schema di Collegamento

Fissaggio batteria


T1

Standard DIN Post

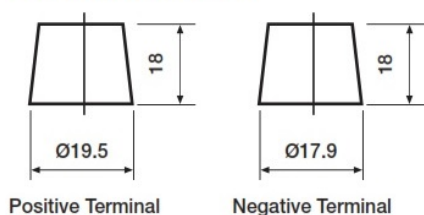

Positive Terminal

Negative Terminal

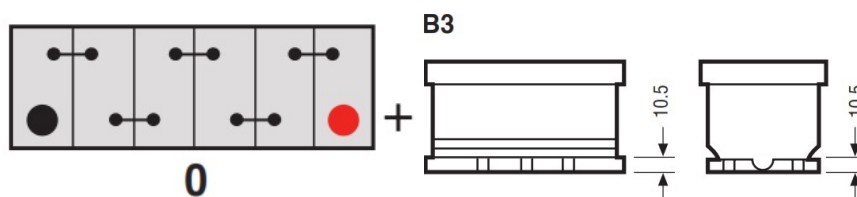

Scheda tecnica prodotta su E&OE



Yuasa Technical Data Sheet

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Yuasa YBX9115 - YBX9000 AGM Start Stop Plus Batteries

Performance

Voltage	12V
Capacity (20-hour)	80Ah
Cold Cranking Amps (EN1)	800A

Dimensions

Length	317mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	23.2kg
-----------------------	--------



Container Features

Case Type	L4 DIN AGM
Hold Down	B3
Handles	✓
End Venting	✓
Semi-Traction Features	✓
Lid Type	VRLA


Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca VRLA
VDA Roll Over Test	AGM
Recommended Charge Rate	✓
Performance Marking	5A
	W5-C2-V3-M3

Terminal Type

T1


Standard DIN Post

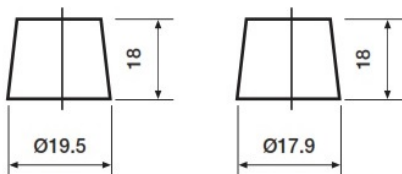


Positive Terminal

Negative Terminal

Cell Assembly Layout

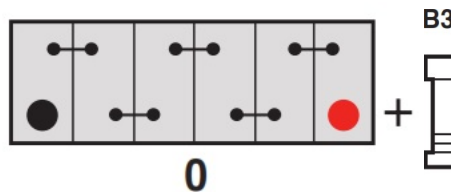

Battery Hold-down

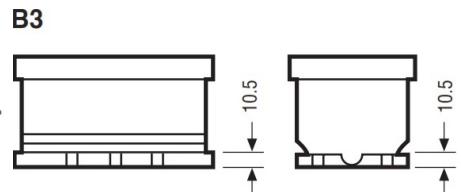

Data Sheet generated on 26/03/2021 - E&OE

