



Yuasa Scheda Tecnica

Yuasa HJ-S46B24R

Prestazione

Tensione	12V
Capacità (20 ore)	45Ah
Corrente di spunto A (EN1)	325A

Dimensioni

Lunghezza	238mm
Profondità	129mm
Altezza	227mm

Pesi e Misure

Peso medio con acido	12.7kg
----------------------	--------



Caratteristiche del Monoblocco


Tipo di monoblocco	B24 JIS AGM
Schema polarità	1
Fissaggi alla base	N
Maniglie	✓
Applicazioni da semi trazione	✓
Tipo di coperchio	VRLA

Tecnologia

Pastiglia antideflagrante	✓
Tecnologia	Ca/Ca VRLA
Separatore	AGM
Vibrazioni	V1 (30Hz/3g/2hr)
Corrente di carica raccomandata	3A
Performance Marking	W5-C2-V2-E2


Tipologia dei terminali

T3
Small Japanese
JIS Terminal



Positive Terminal Negative Terminal

Schema di Collegamento

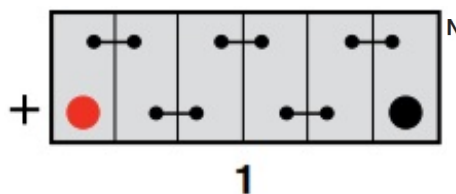

Fissaggio batteria



Scheda tecnica prodotta su E&OE



Yuasa Technical Data Sheet

Yuasa HJ-S46B24R

Performance

Voltage	12V
Capacity (20-hour)	45Ah
Cold Cranking Amps (EN1)	325A

Dimensions

Length	238mm
Width	129mm
Height	227mm

Weights & Measures

Mean Weight with Acid	12.7kg
-----------------------	--------



Container Features


Case Type	B24 JIS AGM
Cell Layout	1
Hold Down	N
Handles	✓
Semi-Traction Features	✓
Lid Type	VRLA

Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca VRLA AGM
Vibration	V1 (30Hz/3g/2hr)
Recommended Charge Rate	3A
Performance Marking	W5-C2-V2-E2


Terminal Type

T3
Small Japanese
JIS Terminal



Positive Terminal Negative Terminal

Cell Assembly Layout

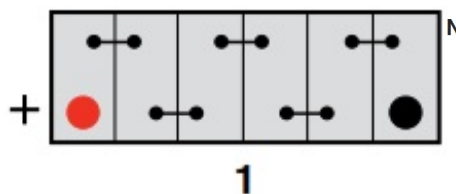

Battery Hold-down



Data Sheet generated on 06/08/2021 – E&OE